

PRODUCT DATASHEET

EVOSHIELD® COATING

What is EvoShield®?

EvoShield® is our trade marked fastener coating. It is a non-organic, tri-layered ceramic surface coating developed to attain optimum performance in the various pollutive and atmospheric conditions that cause corrosion.

The distinguishing feature of **EvoShield®** is the tight joining of the baked resin layer and the ceramic layer thanks to the cross-linking effect. These layers are bonded together with the metallic zinc layer through chemical reactions, and this unique method of combining layers results in a rigid and dense combination of the coating films. **EvoShield®** treatment does not attribute its anti-corrosion properties to merely a single material, but the synergy of these three layers, which combined have superb rustproof qualities.


Compatible with metal coated and painted surfaces, fasteners coated with **EvoShield®** are resistant to acid and alkaline attack, galvanic corrosion and hydrogen embrittlement. These fasteners conform to corrosive gas test standard (Kesternich) DIN50018 and give a salt spray fog test to exceed (JISZ2731) 1,000 hours (ASTM B117).



www.evolutionfasteners.co.uk

Benefits of EvoShield®

- Available with 500hr/1,000hr hour salt spray rating
(please refer to the relevant datasheet for details of the salt spray rating of a specific product or call/e-mail us)
- Superior corrosion resistance. Excellent against gas, weathering and other corrosive factors including salt water.
- Resistant to acid and alkaline attack, galvanic corrosion and hydrogen embrittlement.
- Corrosion resistance against scratches. Composite layers minimise the effect of scratches on the protection coating.
- Electrolytic corrosion resistance. Less contact corrosion with other metals.
- Low process temperature. The drying temperature below 200 C protects the products from metallo graphic changes.
- Paintable

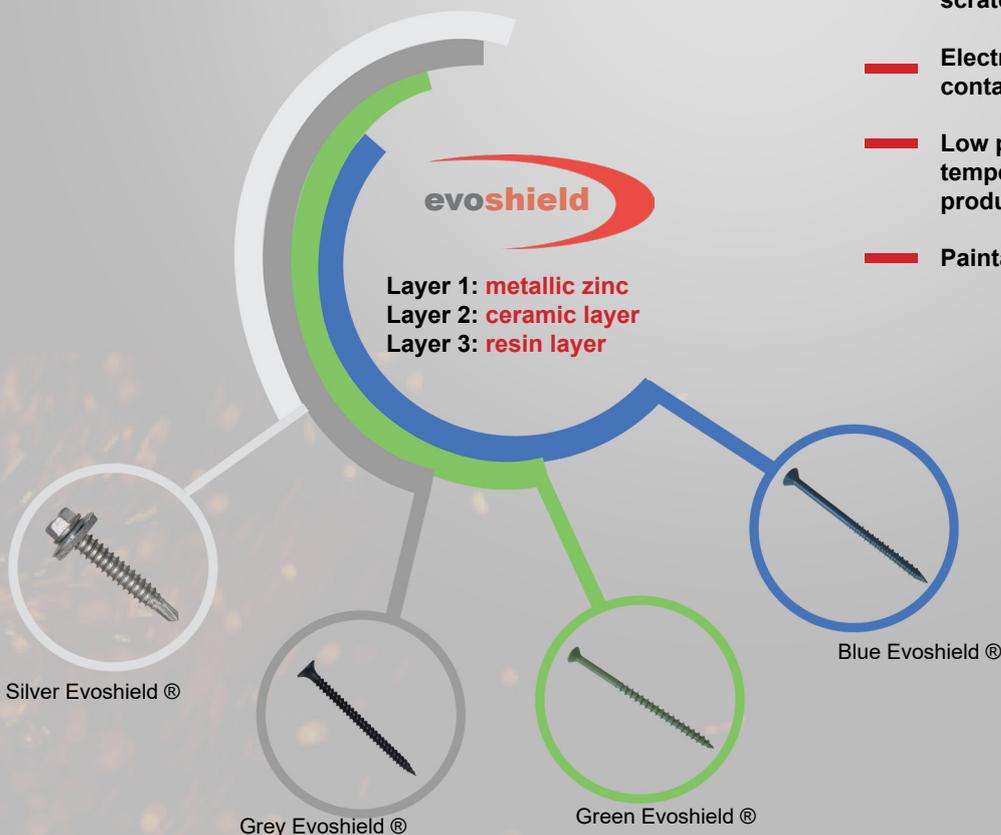

Available in a variety of colours

Evolution Fasteners UK Ltd
Clyde Gateway Trade Park
Dalmamock Road
Rutherglen
Glasgow
G73 1AN

Tel: +44 (0) 141 647 7100

Fax: +44 (0) 141 647 5100

technical@evolutionfasteners.co.uk